

Sunny-GII ***Plus***



TATSUNO
FILLS UP YOUR *Happiness*

Sunny-GII
Plus

RELIABLE

JAPAN QUALITY DISPENSER



THIS SALE

999990

\$

LITERS

99.00

PRICE / LITER

99999

\$

BLUE LED DISPLAY Long-lasting. A fine display uses visibility bright blue LED back light.

EMERGENCY



STOP

Preset Instruction

1. Emergency stop button is for emergency use only.
2. Do not use the emergency stop button for normal operation.
3. Reset the emergency stop button.



WINDOW and DISPLAY
Standard - equipped with user-friendly keypad.

NEW CURVED DESIGN

SUPPORTED BY FULL RANGE OF OPTIONS

- Non-resettable electromagnetic totalizer
- Emergency stop switch
- Double swivel
- Emergency shut-off valve (Shear valve)
- High-speed : 60 L/min
- Maximum speed : 80 L/min
- Sight glass
- Safety coupling
- Washable filter
- Top gallery panel

GLOBAL STANDARD COMPONENTS

- Meet OIML standards and achieving optimum balance of excellent performance economically
- Compact body fits into narrow spaces



■ Gear Pump Type



■ 4-Piston flow meter



LIST OF FUNCTION AND MODELS



■ Dimension




■ Type 1111

- P 1 pump
- N 1 nozzle
- C 1 counter
- M 1 simultaneous



■ Type 1222

- 1 pump P
- 2 nozzle N
- 2 counter C
- 2 simultaneous M

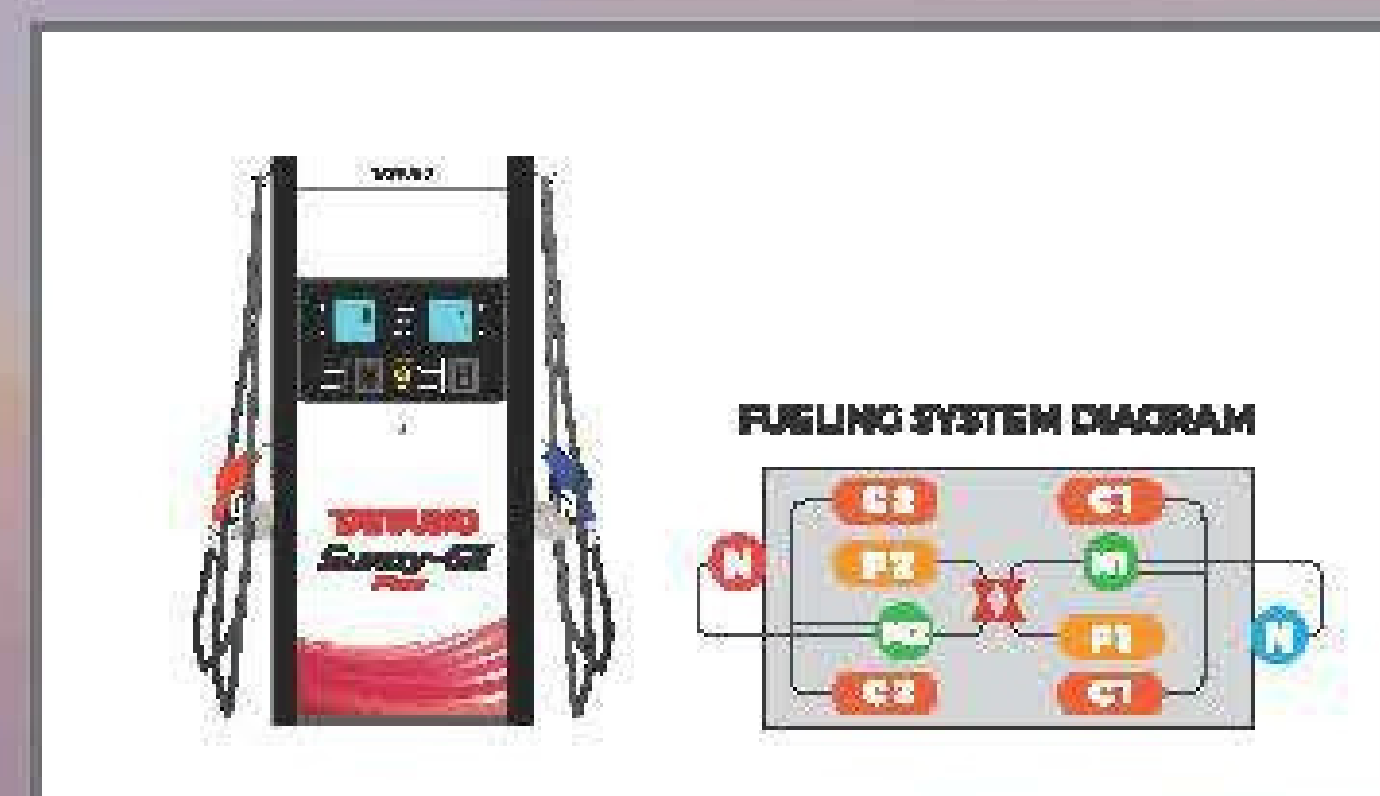

■ Type 2222

- P 2 pump
- N 2 nozzle
- C 2 counter
- M 2 simultaneous

Specifications

Delivery Speed	Standard speed (Gasoline/Diesel) : 40 - 45 L/min
	High speed (Gasoline/Diesel) : 50 - 60 L/min
	Max speed (Diesel) : 70 - 80 L/min
	Delivery speed is fluctuate by installed components (Suction type)
	Delivery speed is fluctuate by STD and installed components (Submersible type)
Suction Head (Suction Type)	4 m (Gasoline column) / max 5 m (Diesel column)
Measuring Accuracy	± 0.25%
Display Type	Micro-computer type electronic counter at non-hazardous area
Price and Volume Indication	Price : 7 digits 0.01 - 99,999.99
	Volume : 7 digits 0.01 - 99,999.99
	Unit price : 5 digits 0.01 - 999.99
	Decimal places are possible to change according to each local specification
Size of Display Character	Price readout : 30H x 120W mm
	Volume readout : 30H x 120W mm
	Unit price readout : 24H x 98W mm
Color of Display Character	Black characters with BLUE backlight. (LCD)
Reset Device	Automatic reset in nozzle holster
Totalizer	Electronic : 10 digits 99 999 999.99 liters (Displayed on counter)
Daily Totalizer	Electronic : 10 digits 99 999 999.99 liters (Displayed on counter)
Keypad	Volume and amount preset can be set up from dispenser.
	Numeric key only
Over Voltage Protector	Provided
Self-diagnosis	Provided
Initial-setting Method	By using keypad
Pulser	0.01 L/pulse
Pump (Suction Type)	Internal silent gear pump with air separator, by-pass valves, suction strainer and check valves
Meter	4-piston type positive displacement meter with electronic calibration
Flow Control Valve	2-stage valve
Motor (Suction Type)	Explosion-proof, continuous duty motor with over-load protection
	1-phase 3/4 HP (220 to 240 V) 1-phase 1 HP (220 to 240 V) 3-phase 1 HP (380 V)
Filter (Submersible Type)	Paper filter
Hose	3/4" x 15 ft
Nozzle	3/4" automatic stop nozzle
Swivel	Single swivel





ศูนย์บริการ TASPOW CARE
ดูแลครบวงจร

ตั้งแต่เลือกสินค้า ออกแบบระบบ
ติดตั้ง ทดสอบ และบริการหลังการขาย

- ให้คำปรึกษา ระบบจัดการน้ำมัน
- สำรวจและออกแบบหน้างาน
- ติดตั้งและทดสอบระบบ
- อะไหล่และซ่อมบำรุง
- บริการหลังการขาย

ตัวแทนจำหน่ายผลิตภัณฑ์ TATSUNO

บริษัท ทัสพาว จำกัด

พร้อมให้คำปรึกษาฟรี

สำนักงานใหญ่

189/56 หมู่ 1 ต.บางเตย อ.สามพราน จ.นครปฐม 73210

สาขาท่ามะกา

63/15 หมู่ 6 ต.ท่าไม้ อ.ท่ามะกา จ.กาญจนบุรี 71120

สาขาพนมทวน

3/2 หมู่ 6 ต.ดอนเจดีย์ อ.พนมทวน จ.กาญจนบุรี 71140

ฝ่ายขาย

063-225-8270

แจ้งซ่อม 062-196-1557

sale01@taspow.com

www.taspow.com



Fuel Management Solutions

ตู้จ่ายน้ำมัน • ถังน้ำมัน • ปั๊มและมิเตอร์ • โปรแกรมควบคุม
การเติมน้ำมัน • งานระบบและบริการหลังการขาย

TASPOW - เพื่อนรู้ใจคนใช้น้ำมัน